

TWIN SYSTEM BRIDGE SAWS


PATENTED SYSTEM
2 SAWS IN 1



DONATONI
HIGH INNOVATION STONE MACHINES

Highest quality For your skill

To highlight a machine and its potential often means to open the doors to new opportunities and markets

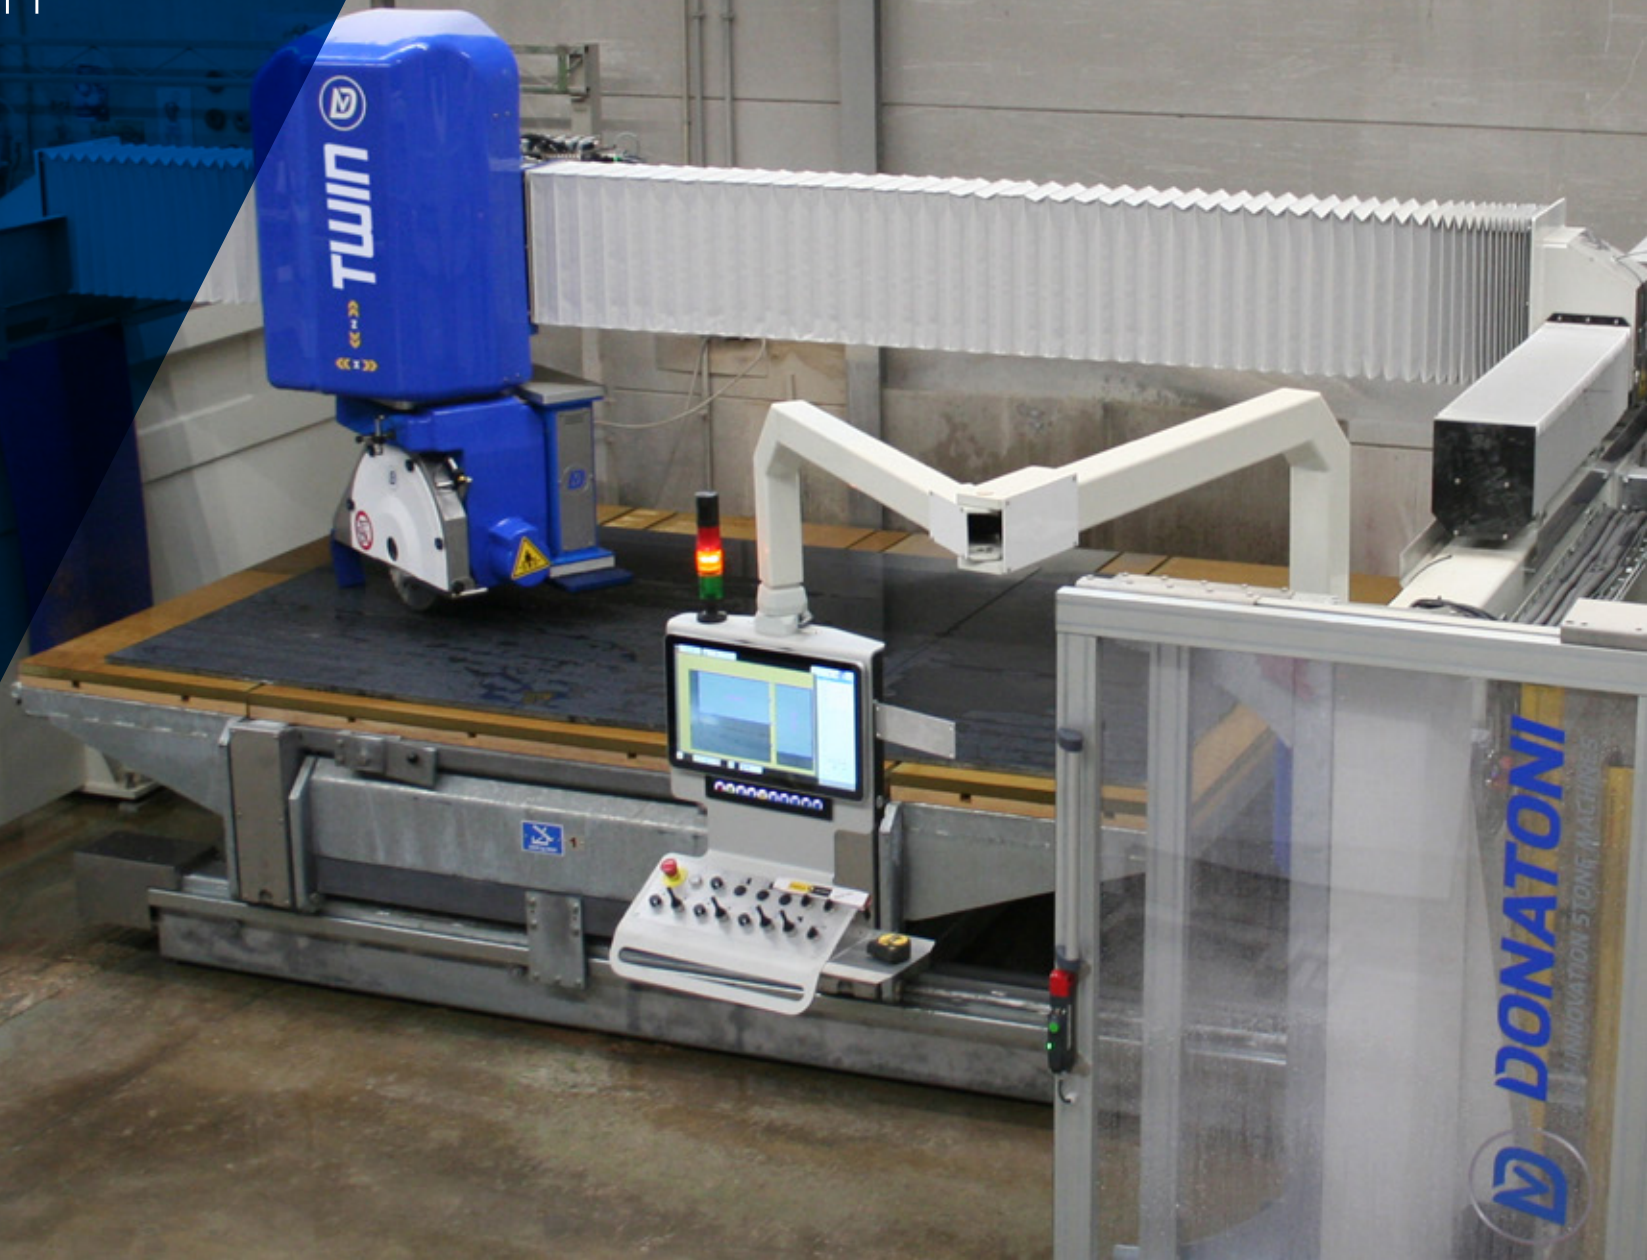



CONTENTS

07 TWIN SYSTEM ADVANTAGES

09 ECHO TWIN

11 SPRINTER TWIN

13 COMPONENTS AND OPTIONALS

17 SOFTWARE

23 SERVICES AND AFTER-SALES SERVICE

25 TECHNICAL DATA

MECHANICAL PERFECTION, TECHNOLOGICAL PRECISION

TWIN SYSTEM



UNRIVALLED THROUGHPUT

D625+Twin, ECHO TWIN and Sprinter are 5/6 interpolated axes numeric control bridge saws equipped with the TWIN System, the Donatoni Machine's **patented system** to fully optimise a bridge saw performance, by increasing the production capacity up to the 70%.

The **Twin System** consists of a **double bench with automatic system of benches exchange**, it lays on a rails-monoblock frame, on which the two benches are alternatively moving between cutting and unloading areas. The operator can carry-

out unloading and programming operating on the 1st bench while the machine is working on the 2nd bench.

TWIN system advantages:

- Increase of **production capacity**
- **Only 1 operator** needed
- **2 saws in 1**: possibility to use the machine as a traditional bridge saw and to perform shaping operations of workpieces having up to 300 mm thickness.




HIGH
PRODUCTIVITY




ONLY ONE
OPERATOR
NEEDED



NO NEED OF
FOUNDATION



REDUCED
DIMENSIONS



CNC TECHNOLOGY
PRECISION AND
PRODUCTIVITY



CUTTING
OPTIMIZATION



SIMPLE AND EASY
TO PROGRAM

TYPES OF WORKINGS



LONGITUDINAL
CUTS



0-90° INCLINED
CUTS



ELLIPTICAL
CUTS



CROSS
CUTS



ORTHOGONAL CUTS
UP TO 250MM






SHAPES



OBLIQUE
CUTS



EXCAVATION
OF BLOCKS

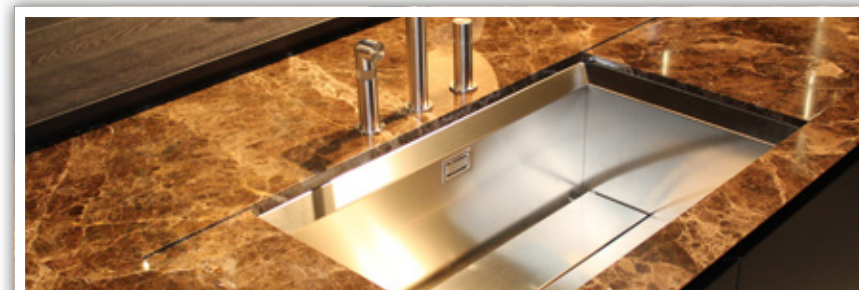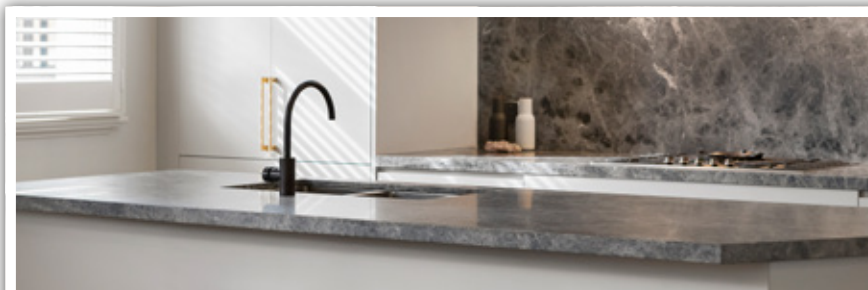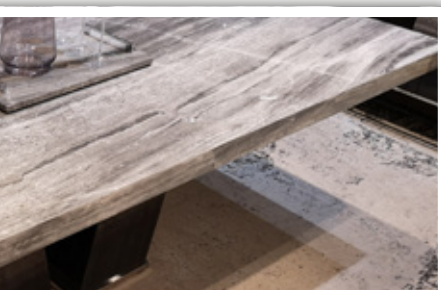

A PATENTED SYSTEM FOR INCREASED PRODUCTIVITY

THE SOLUTION FOR
GROWING COMPANIES

PRODUCTIVITY COMPARISON*

The following sketch is showing a production process comparison between traditional bridge saw and twin-system equipped bridge saw.

Advantages of the last one are reduction of machine's downtime and **production increase up to 70%.**


*The data are purely indicative and may vary depending on the type of material, plate thickness, disk used and other factors not directly dependent on the machine.

Possibility to use the machine as a traditional bridge saw and to perform shaping processing operations.



| TRADITIONAL BRIDGE SAW | |
|-----------------------------------|---------|
| N. OPERATORS | 1 |
| SURFACE CUTS (8 working hours) | 120 SQM |


| TWIN SYSTEM | |
|-----------------------------------|---------|
| N. OPERATORS | 1 |
| SURFACE CUTS (8 working hours) | 200 SQM |

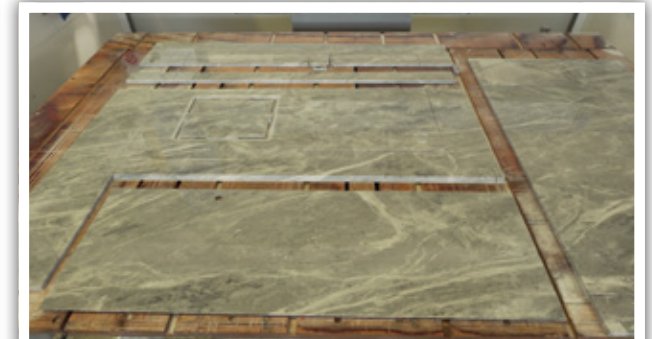

PRODUCTION CYCLE




TRADITIONAL BRIDGE SAW


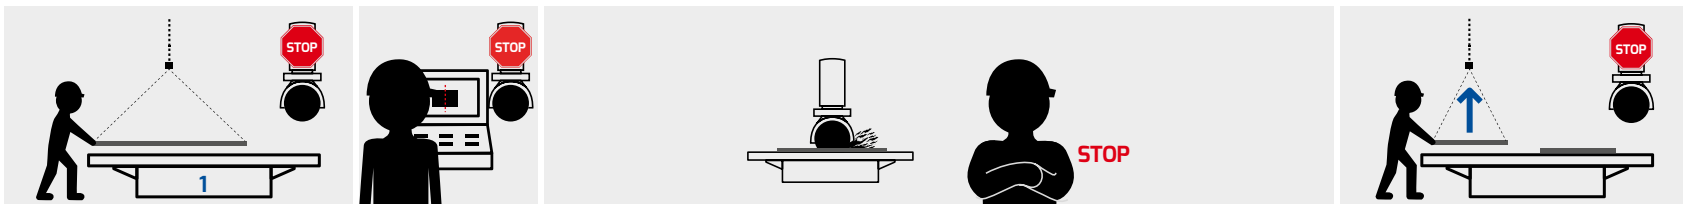


TWIN SYSTEM

Cutting area

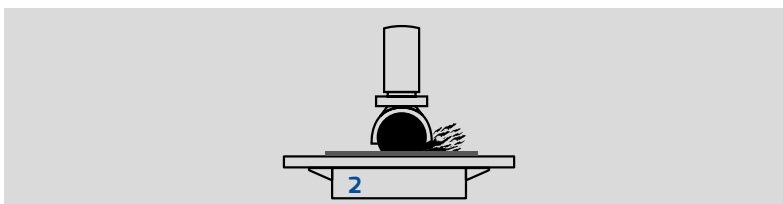

Loading/
unloading area

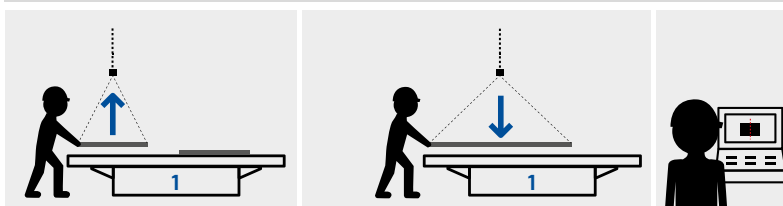

BENCHES EXCHANGE
35 SECONDS

WORKING TIME GAINED

+70%

OF PRODUCTION



MACHINE
DOWNTIME



PRODUCTIVITY

Twin monoblock frame
made in galvanized steel to
avoid concrete foundation
below the floor level, on
which the sliding rails of
the benches are placed.

Benches exchange time:
35 seconds.



D625

D625+TWIN is a **5/6 interpolated axes numeric control bridge saw**, **Z axis stroke 550 mm** equipped with **Twin system** and **electrospindle** with maximum power of **22 kW/S6**.

D625+TWIN is suited to produce different kind of products such as kitchen and vanity tops, engraving, bas-reliefs and different coating for building industry. The machine is allowing to perform **a wide range of processings**, like cutting, milling, drilling and shaping. The countless accessories supplied are granting the possibility to perform all these processing without moving the piece from the working bench and without prolonged downtime.




Wheels with locking system that avoids any displacement



Z axis stroke:
600 mm

CUTTING AREA

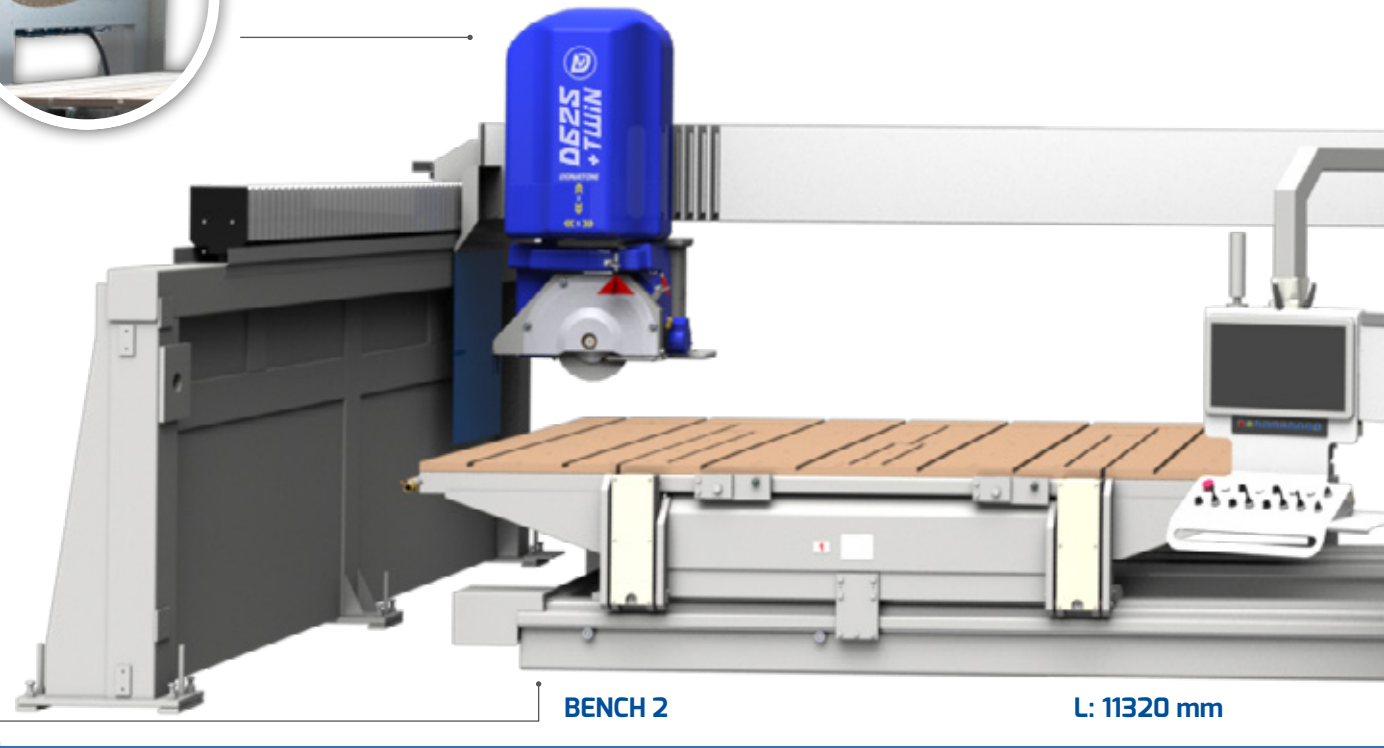


BENCH 2

L: 11320 mm

MAIN FEATURES

- / 5/6 INTERPOLATED AXES
- / Z-AXIS STROKE: 550 MM
- / DIAMETER MIN / MAX DISKS: 350-625 MM
- / BENCHES EXCHANGE TIME: 35 SEC.
- / STEEL BRIDGE WITH NEW REINFORCED STRUCTURE FOR GREATER STABILITY
- / TOOLS ELECTROSPINDLE POWER 22 KW / S6
- / SUCTION HANDLING SYSTEM
- / MAXIMUM LIFTING WEIGHT WITH SUCTION CUPS: 600 KG
- / OIL BATH SLIDING GUIDES LUBRICATION
- / BRUSHLESS MOTORS AND HIGH-PRECISION GEARBOXES CONTROLLED BY INVERTER FOR X-Y-Z AXIS SLIDING
- / TILTING BENCHES WITH WOODEN OR RUBBER TOP

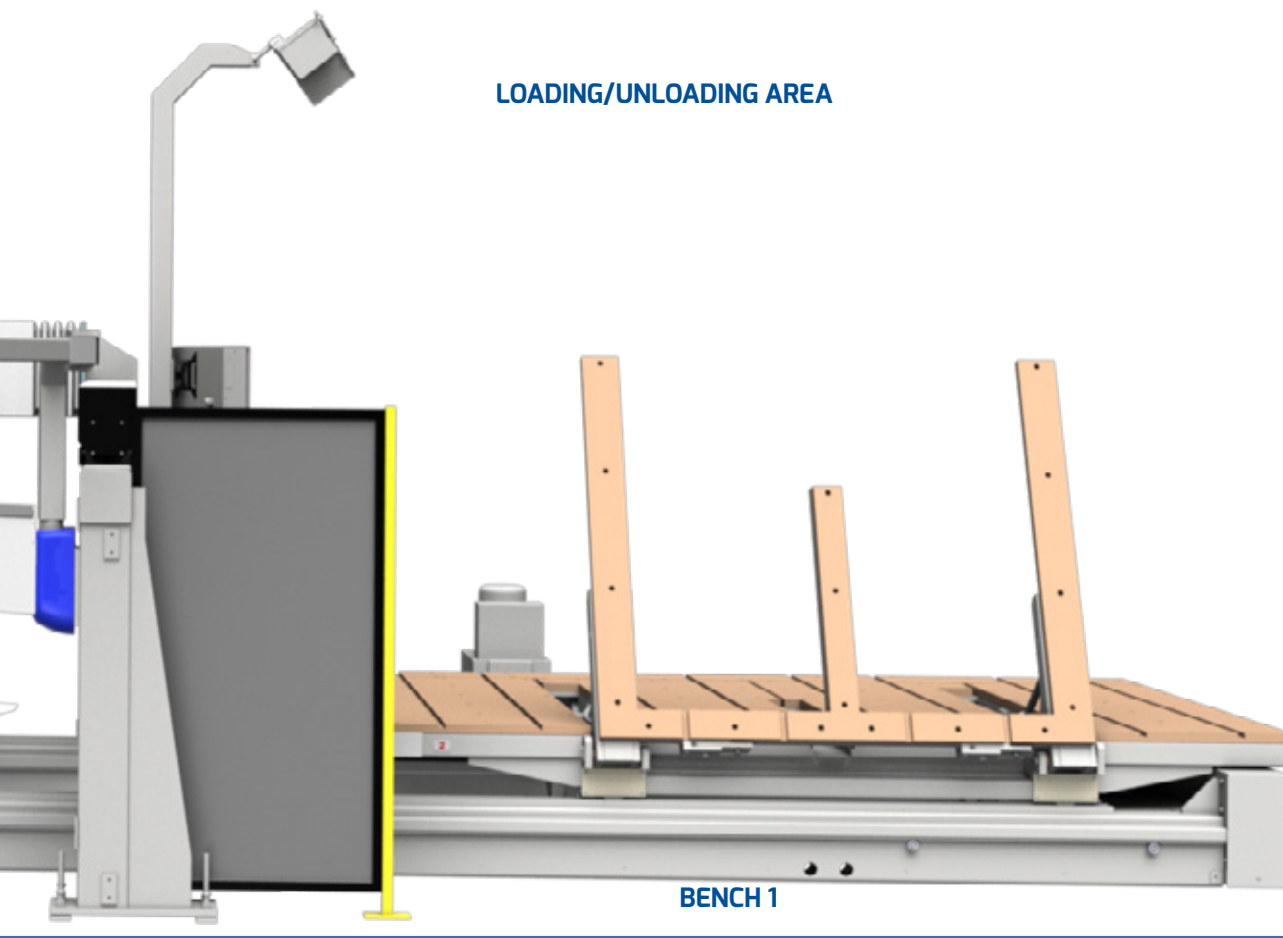

LOADING/UNLOADING AREA


h: 3500 mm



Tilting benches with wood or rubber surface (at customer's choice) with hydraulic lifting system and capacity up to 1650 kg.

BENCHES TECHNICAL DATA

| DIMENSIONS | | MAX CUTTING THICKNESS WITH BLADE Ø525 MM |
|---------------------------------|---------------------------|------------------------------------------|
| Bench 1: 3800 X 2400 X H 900 | | A: 150 mm |
| Bench 2: 3800 X 2300 X H 640 | With manual front loading | B: 200 mm |
| | With Twin System working | C: 100 mm |

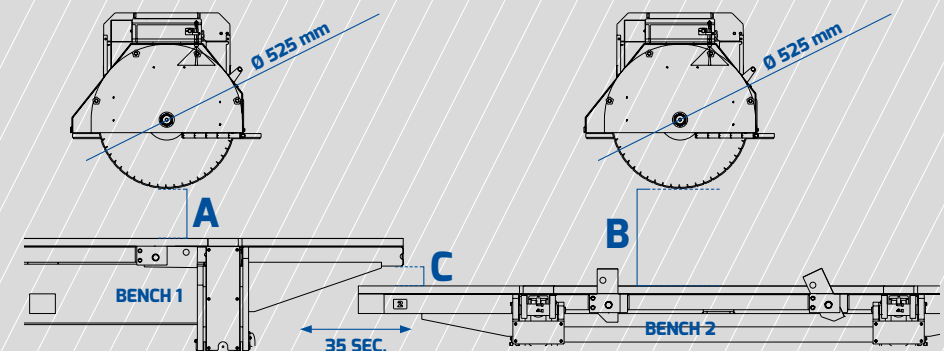

ECHO TWIN

ECHO TWIN is a **5/6 interpolated axes numeric control bridge saw**, **Z axis stroke 600 mm** equipped with **Twin system** and **electrospindle** with maximum power of **17 kW/56**.

ECHO TWIN is suited to produce different kind of products such as kitchen and vanity tops, engraving, bas-reliefs and different coating for building industry. The machine is allowing to perform **a wide range of processings**, like cutting, milling, drilling and shaping. The countless accessories supplied are granting the possibility to perform all these processing without moving the piece from the working bench and without prolonged downtime.




Wheels with locking system that avoids any displacement



Z axis stroke:
600 mm

CUTTING AREA

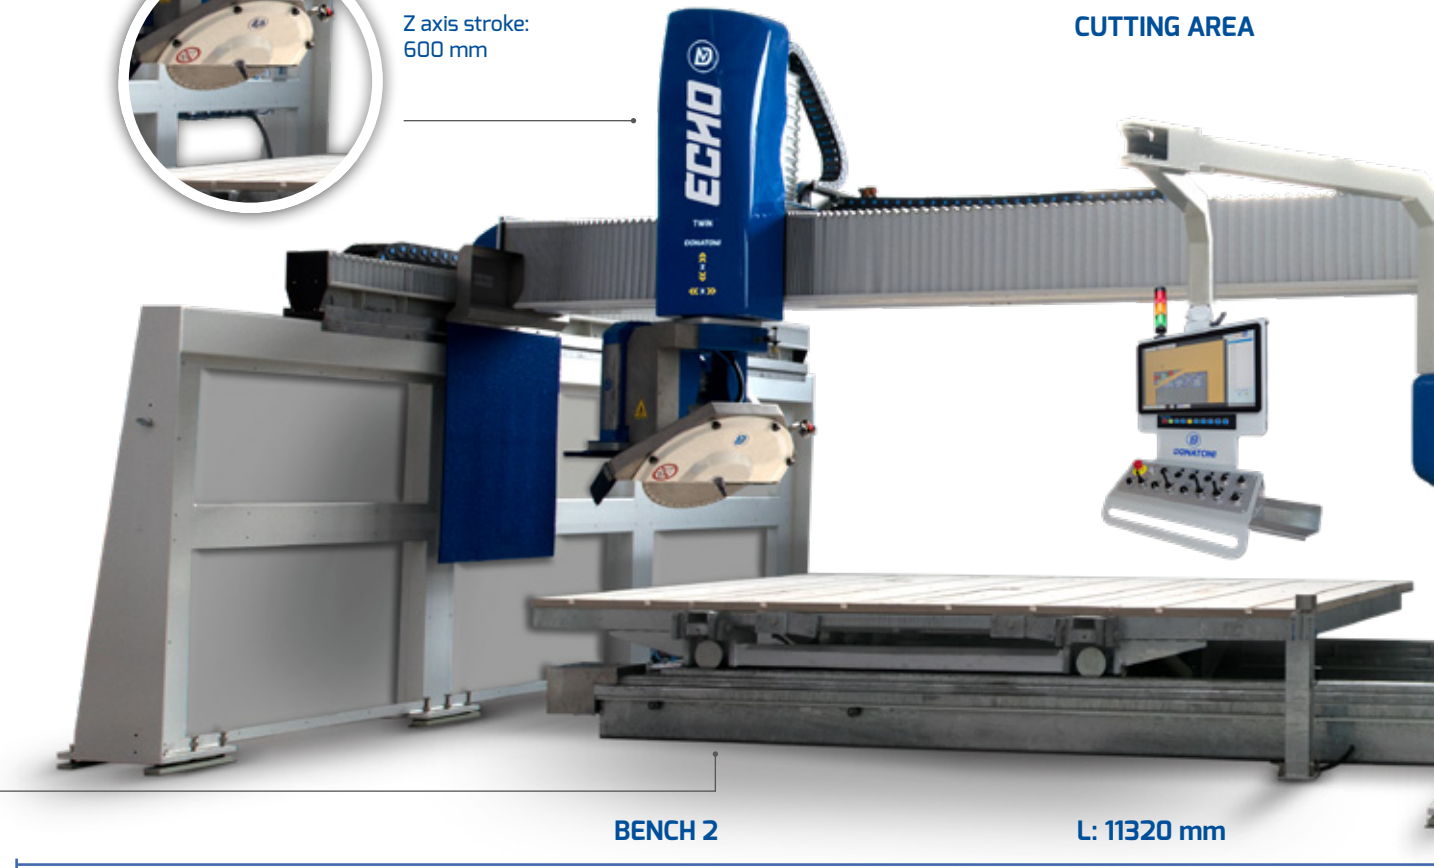

BENCH 2

L: 11320 mm

MAIN FEATURES

- / 5/6 INTERPOLATED AXES
- / Z-AXIS STROKE: 600 MM
- / DIAMETER MIN / MAX DISKS: 350-725 MM
- / BENCHES EXCHANGE TIME: 35 SEC.
- / STEEL BRIDGE WITH NEW REINFORCED STRUCTURE FOR GREATER STABILITY
- / TOOLS ELECTROSPINDLE POWER 17 KW / 56
- / SUCTION HANDLING SYSTEM
- / MAXIMUM LIFTING WEIGHT WITH SUCTION CUPS: 600 KG
- / OIL BATH SLIDING GUIDES LUBRICATION
- / BRUSHLESS MOTORS AND HIGH-PRECISION GEARBOXES CONTROLLED BY INVERTER FOR X-Y-Z AXIS SLIDING
- / TILTING BENCHES WITH WOODEN OR RUBBER TOP


LOADING/UNLOADING AREA



Tilting benches with wood or rubber surface (at customer's choice) with hydraulic lifting system and capacity up to 1650 kg.

BENCHES TECHNICAL DATA

| DIMENSIONS | | MAX CUTTING THICKNESS WITH BLADE Ø625 MM | MAX CUTTING THICKNESS WITH BLADE Ø725 MM |
|---------------------------------|---------------------------|------------------------------------------|------------------------------------------|
| Bench 1: 3800 X 2400 X H 900 | | A: 180 mm | A: 130 mm |
| Bench 2: 3800 X 2300 X H 640 | With manual front loading | B: 200 mm | B: 250 mm |
| | With Twin System working | C: 100 mm | C: 100 mm |

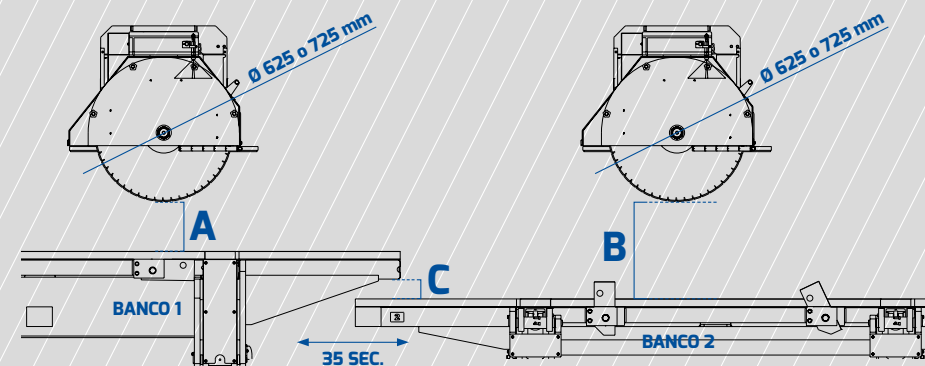

SPRINTER TWIN

SPRINTER TWIN is a 5/6 interpolated axes numeric control bridge saw, Z axis stroke 800 mm equipped with Twin system and electrospindle with maximum power of 22 kW/S6.

SPRINTER TWIN is suited to produce different kind of products such as kitchen and vanity tops, engraving, bas-reliefs and different coating for building industry. The machine is allowing to perform a **wide range of processings**, like cutting, milling, drilling and shaping. The countless accessories supplied are granting the possibility to perform all these processing without moving the piece from the working bench and without prolonged downtime.




Wheels with locking system that avoids any displacement



Z axis stroke:
800 mm

CUTTING AREA

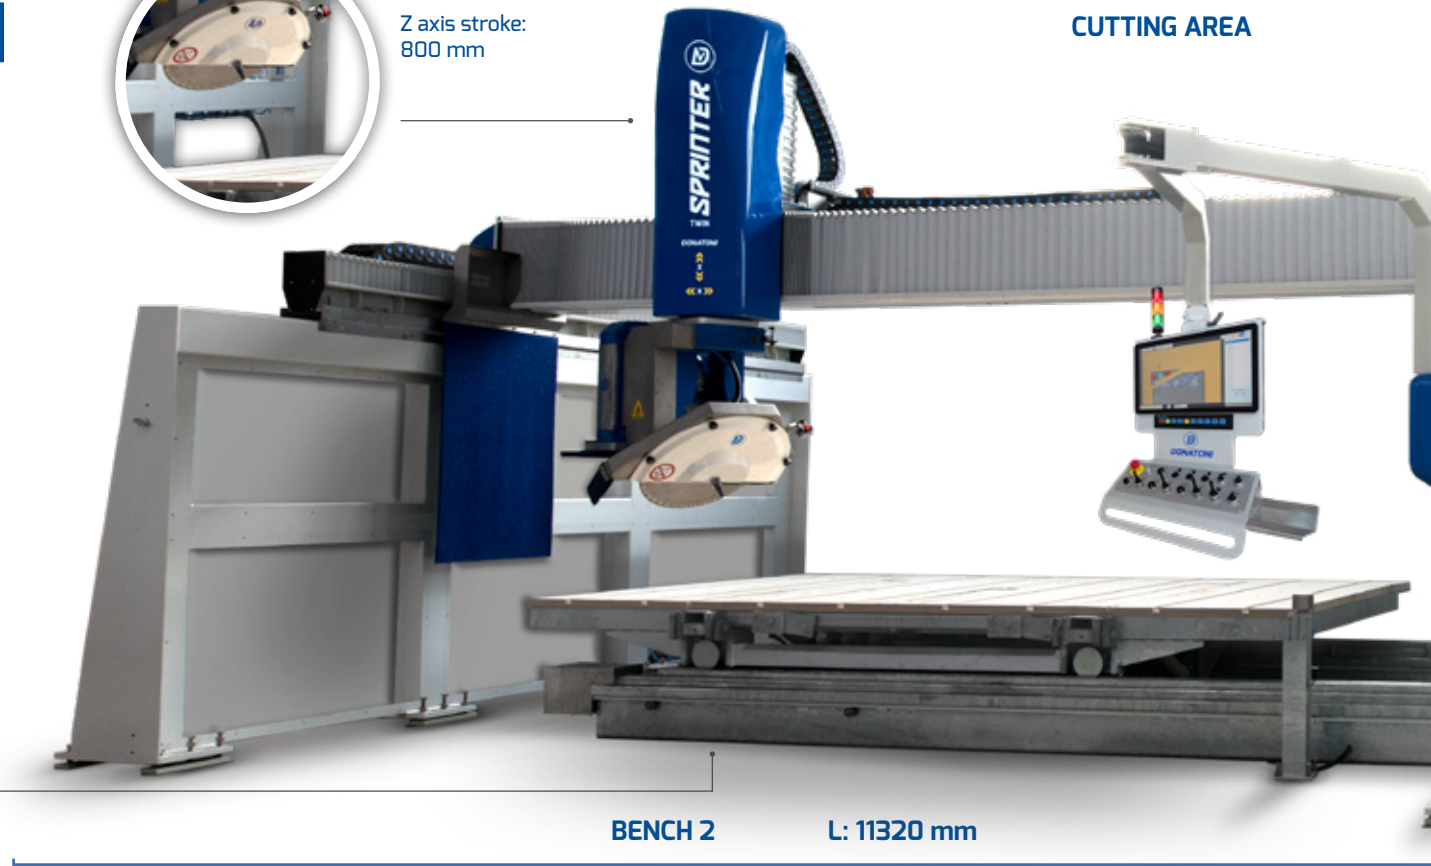

BENCH 2

L: 11320 mm

MAIN FEATURES

- / 5/6 INTERPOLATED AXES
- / Z-AXIS STROKE: 800 MM
- / DIAMETER MIN / MAX DISKS: 350-825 MM
- / BENCHES EXCHANGE TIME: 35 SEC.
- / STEEL BRIDGE WITH NEW REINFORCED STRUCTURE FOR GREATER STABILITY
- / TOOLS ELECTROSPINDLE POWER 22 KW / S6
- / SUCTION HANDLING SYSTEM
- / MAXIMUM LIFTING WEIGHT WITH SUCTION CUPS: 600 KG
- / OIL BATH SLIDING GUIDES LUBRICATION
- / BRUSHLESS MOTORS AND HIGH-PRECISION GEARBOXES CONTROLLED BY INVERTER FOR X-Y-Z AXIS SLIDING
- / TILTING BENCHES WITH WOODEN OR RUBBER TOP


LOADING/UNLOADING AREA



Tilting benches with wood or rubber surface (at customer's choice) with hydraulic lifting system and capacity up to 1650 kg.

BENCHES TECHNICAL DATA

| DIMENSIONS | | MAX CUTTING THICKNESS WITH BLADE $\varnothing 725$ MM | MAX CUTTING THICKNESS WITH BLADE $\varnothing 825$ MM |
|---------------------------------|---------------------------|-------------------------------------------------------|-------------------------------------------------------|
| Bench 1: 3800 X 2400 X H 900 | | A: 250 mm | A: 280 mm |
| Bench 2: 3800 X 2300 X H 640 | With manual front loading | B: 250 mm | B: 300 mm |
| | With Twin System working | C: 100 mm | C: 100 mm |

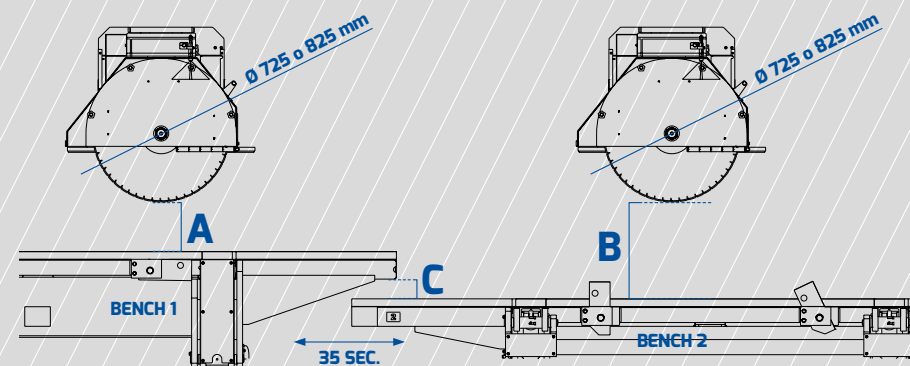


COMPONENTS AND OPTIONALS



Move-System: Suction cups system for the automatic lifting and positioning of cut-to-size pieces granting processing times with minimum waste. The 2 aluminum suction cups are equipped with sectors of various sizes allowing lifting operation of large and small pieces, up to a maximum of 600 kg. it can be

used with blade up to 725 mm diameter.

The Move-System allows to work at the same time and **in automatic mode** both with a tool and blade, by moving pieces on the bench through the suction cups, with no need to switch off the machine.

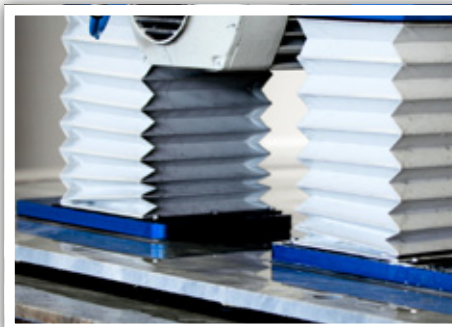



ADVANTAGES

- > Easy to use even for operators with no experience
- > It makes the machine totally automatic
- > Piece motion without operator intervention
- > Makes full use of the slab's surface
- > Increase the efficiency



Ball recirculating sliding crosspieces and helical toothed racks for sliding the Y axis, **with oil bath lubrication** and protected by bellows with labyrinth closure.

Bridge special profile in steel structure with increased section, normalized, sandblasted and painted in triple layer, with hardened and ground toothed pinions and racks with helical toothing, brushless motor and high precision gearbox.

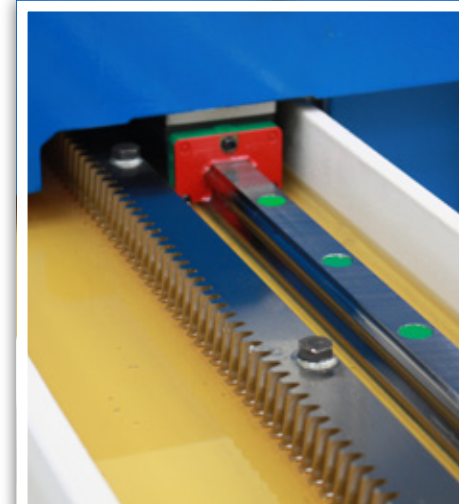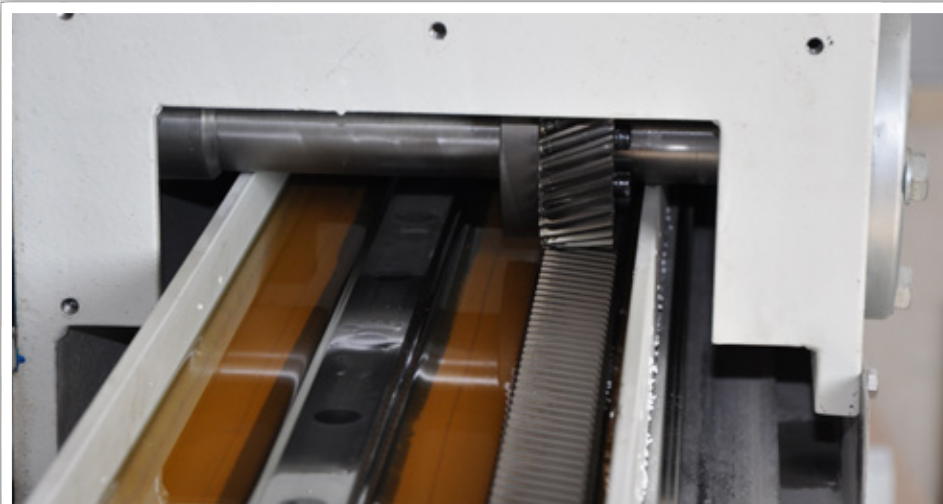

Disk presetting unit: measurement system of blade diameter.





Support walls in standardized steel, sandblasted and painted with triple layer.




Slab thickness detector: system for automatic detection of slab thickness.



Photoslab: plate detection system, with camera positioned above the workbench and image acquisition software. The application allows to speed up the machine programming.

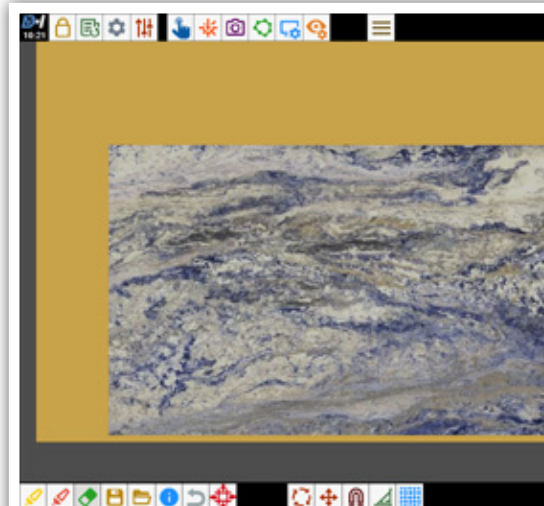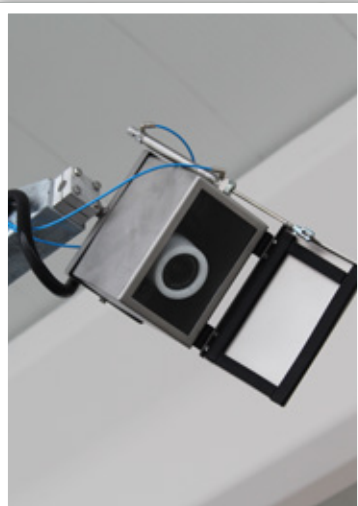

High quality electro-spindles controlled by an inverter allowing the adjustment of the nr. of revolutions from 0 to 5500/7500 rpm, so granting the use of blade and diamond tools such as a core drill or milling cutter. The tool change is of manual or automatic type.

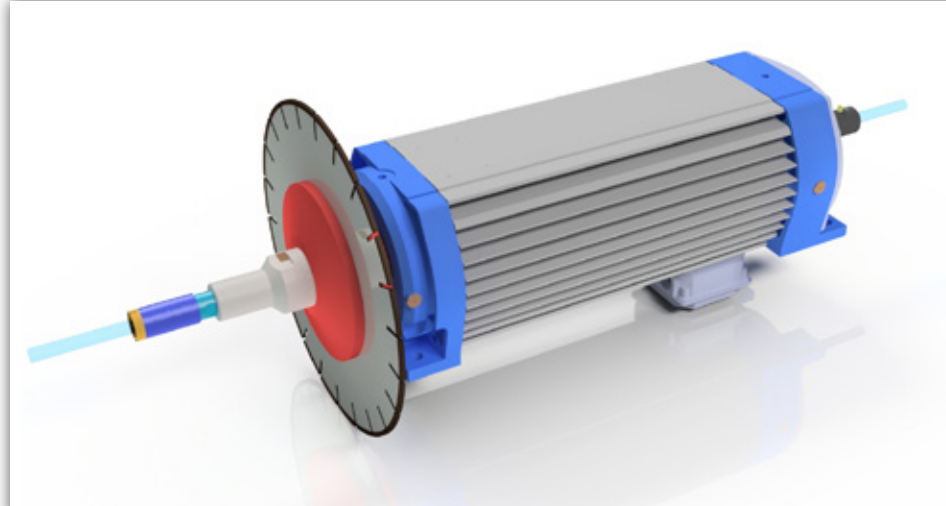


Tool+: vertical lateral electrospindle, allows the operator the use of small diameter diamond tools with 1/2 "gas connection for incremental cutting / blind or through hole drilling and the execution of combined operations with disk and milling cutter.



Support walls in standardized steel, sandblasted and painted with triple layer.



Lower-Cut Group: cutting system for inserting reinforcement bars in the lower part of the kitchen tops (the optional needs the increase of Y axis stroke length).

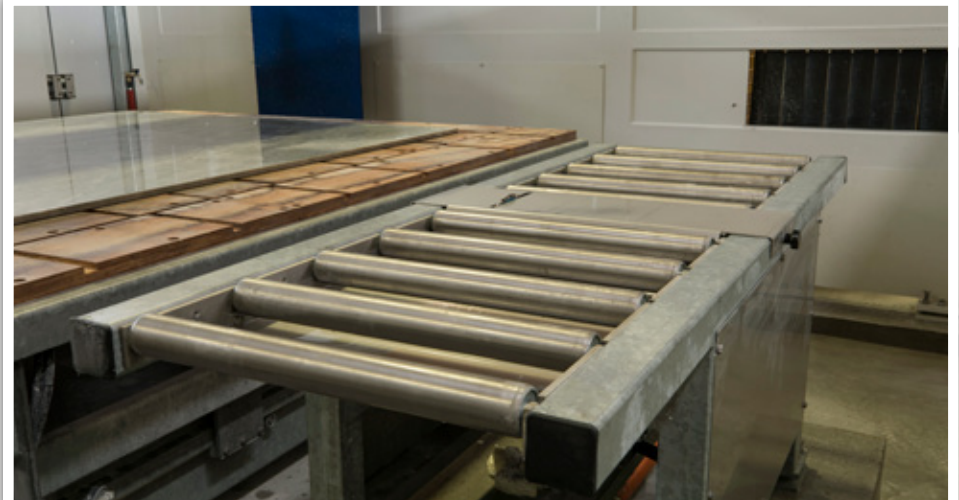

AN INTELLIGENT SYSTEM TO MAKE YOUR WORK EASIER

LET US GUIDE YOU TOWARDS
THE FUTURE OF INTELLIGENT
MACHINES



D-INSIDE:

EQUIP YOURSELVES WITH
A SUPERIOR FORM OF INTELLIGENCE



Perfect machining can only be achieved through multiple movements that need to be perfect coordinated. Just as all the movements in the human body are managed through brain impulses, similarly, the movements of our machines are managed by **integrating the machine with the programming software.**

Every Donatoni machine is born with an intelligent work management system, integrated with all the parts that manage its movements; we call this system **D-Inside**, the real brain of the machine. It is an advanced interface that is simple to use, even for inexperienced operators, which allows the machine-software system to be coordinated.

The D-Inside system offers many programming options and can be interfaced with the different types of Donatoni software, such as Parametrix and all the additional modules, or with CAD-CAM DDX EasySTONE, so as to customise the machine to meet the customer's requirements.



OPERATOR
INTERFACE WITH
PC AND 21" TOUCH
SCREEN MONITOR

HIGH PERFORMANCE
THANKS TO THE
NEW POWERFUL PC

USB
PORTS FOR
TRANSFERRING
FILES

CONTROLS FOR
THE MANUAL
MOVEMENTS
OF EACH AXIS

MOBILE, STIFF ARM
THAT ALLOWS
THE OPERATOR TO
PROGRAM WITH 1
HAND

PARAMETRIX

USER-FRIENDLY ICONS
AND SIMPLE PROGRAMMING




Parametrix is the **simple and user-friendly software** developed by Donatoni Macchine and conceived to **optimise the management of cutting different shaped pieces from slabs**.

It is a programme which allows you to manage cutting processes with disks, **it enables input of rectilinear shapes as well as curvilinear shapes** (steps, kitchen work-tops, rectangles, covers) using pre-defined shapes in the programme or imported from DXF files. Depending on the surface available it is possible to automatically set the position of the pieces and the sequence of cuts, optimising the times and reducing material waste.


Included in the software are functions **for anti-collision of pieces, manual and automatic piece nesting, book matching, managing statistics, production and orders, rendering pieces and holes**.

Parametrix can be combined with Photoslab and Move-System, which allow automatic detection of the slab and movement, via a suction cups system, of the cut pieces **reducing operator intervention to a minimum**.

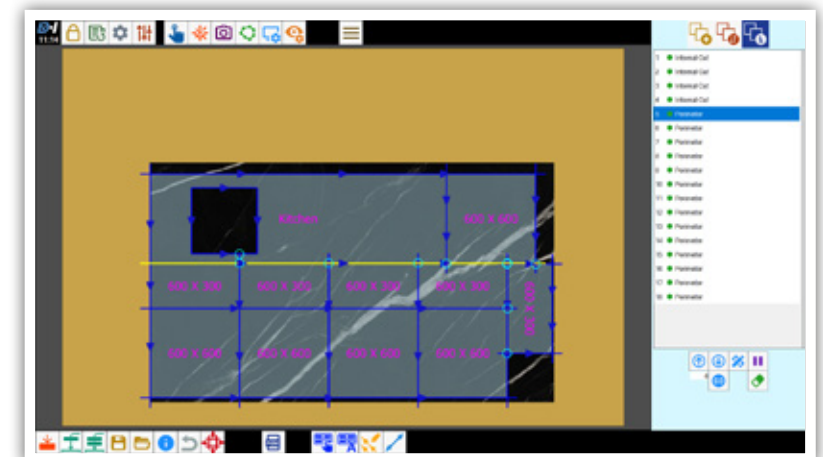

Nesting (included)

Automatically inserts squared or rectangular pieces in the working area optimizing the exploitation of the slab and automatically avoiding highlighted defects.

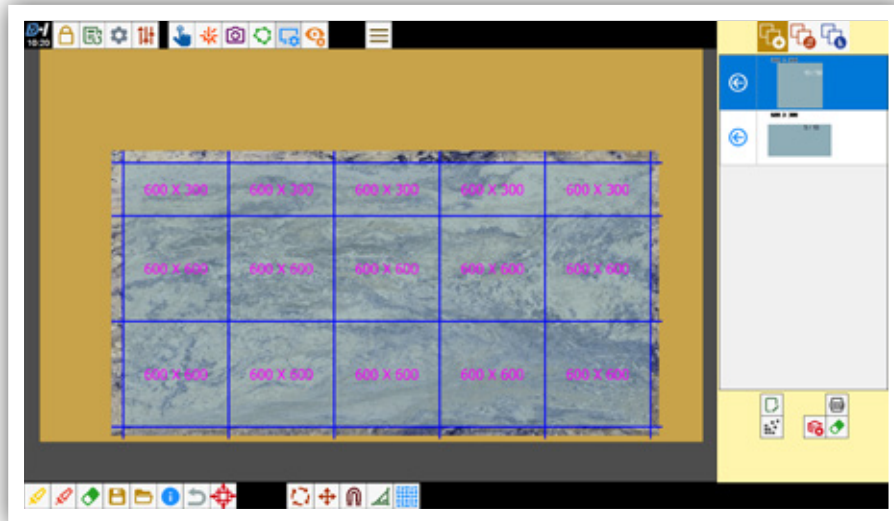

Drilling and processing with milling cutter (included)

It allows you to manage the use of tools, drills and milling cutters, with which it is possible to cut pieces or parts of the slab, to complete the initial processing with blade, such as "L-shaped" internal corners, or to make reductions for recesses. The change from disk to core during processing is automatically managed by the program.

(only for machines version tools, top, mtc, atc, and with tool+ accessory).

Positioning of the pieces on the slab (included)

With the manual nesting program it is possible to preview any collisions between parts so making easier the piece best positioning. The "magnet" function helps the operator to align the pieces one next to the other in order to reduce the number of cuts.

Managing and changing of cuts (included)

After positioning the pieces, cuts can be modified: it is possible lengthen it, to change order of cuts, to disable it, to add pauses; other types of modification before pressing the start button to process the cuts can be made.

Book matching (optional)

Starting from a project in DXF format, it allows to have a 2D image of the parts to be cut and therefore to appreciate before the cut the aesthetic result obtained by the combination of the pieces, evaluating overall and in full the "bookmatching" type processing.

Piece unloading Module (optional)

The program allows to unload the piece in a predefined area; the operator can select on the screen the cut pieces to be unloaded with the Move System of the machine (the software needs the increase of Y axis stroke length).

DM_TL (optional)

Program for slabs smoothing / polishing / brushing by means of plate carrying FRANKFURT abrasives.



PHOTOSLAB

SUPPLIED WITH CAMERA
FOR SLAB "OPTIONAL"

By means of a camera placed above the machine and the related record software, the slab being cut is automatically detected.

The system allows the optimization and the exploitation of the slab dimensions, the speeding of pieces positioning, avoiding possible defects or enabling to perform cuts by following the veins of the material.

The software is automatically enabled with installation of "camera for slabs".

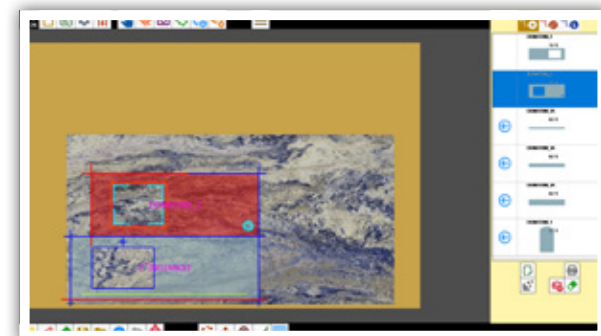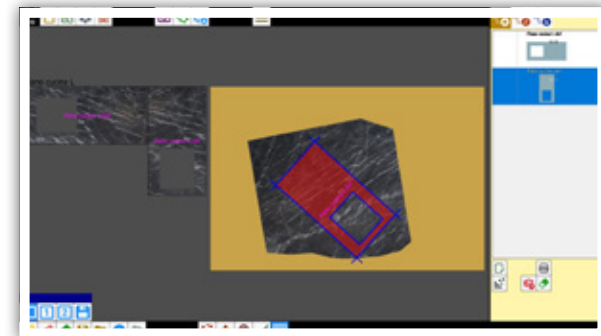

CAD-CAM




OPTIONAL

The software allows to design, import and execute 2D and 3D files in DXF, IGES, STL, PNT, STEP and RHINO formats and to define surfaces and shapes through laser scanning. Multiple processes can be set: roughing, drilling, profiling, emptying and polishing, which can be carried out by optimizing the execution process.

After the import, the software optimizes processing paths, performs roughing / finishing taking into account the raw material resulting after processing.

With CAD-CAM it is possible to display the processing 3D image with virtual milling and to modify it if required. The 3D simulation of the processing, including free displacements, is realistic as it is based on the Customer's machine model and shows the three-dimensional model of the working center, of the bench, of the motors, the tools, the sub-pieces and the pieces .

Once the design phase is completed, CAD-CAM generates the piece-programs and sends it directly to the Customer's working center. Finally, it calculates times, lengths and processing costs, allowing accurate reporting of the work performed.

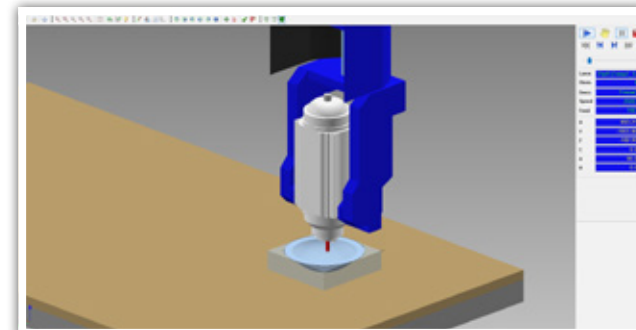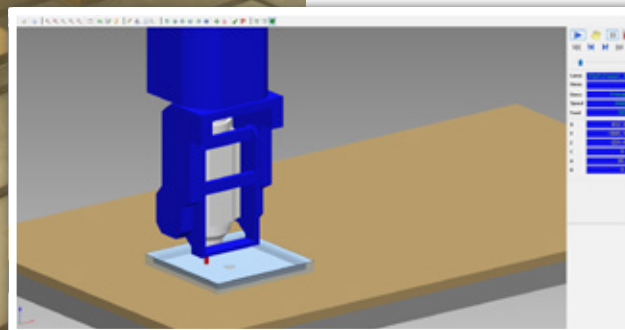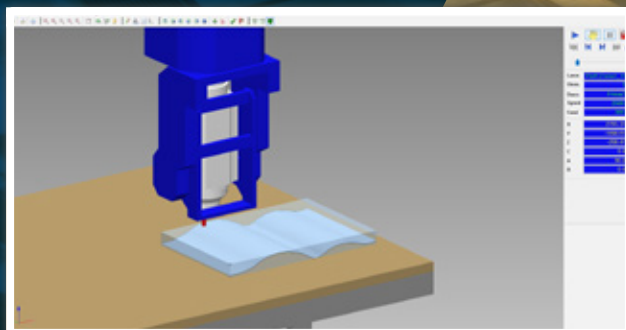

WITH DONATONI YOU ARE NEVER ALONE

AFTERSALES
SERVICE AND ASSISTANCE

The relationship with the customer does not end with the supply of the product but continues and is strengthened through a reciprocal collaboration which creates value for both customer and supplier.



DIRECT CONNECTION WITH OUR TECHNICIANS

Donatoni Service is the company department that is totally devoted to our customers and their needs; it provides a wide range of **services aimed at meeting our customers' all-round requirements**, before, during and after the delivery and installation of the machine and throughout its useful life.

Our highly-qualified personnel have sound experience and are capable of responding to any question or request. We use an open approach that is attentive to specific individual needs since our objective is

to cooperate with and support the customer in its production activities, not only through assistance but also with **technical services and advice** which allow operators to improve their know-how and enhance their production. Speed, reliability and professionalism are the strengths that allow us to ensure an efficient response to your requests; our Service uses the latest generation communication tools and a **global network of partners** so as to provide prompt answers and solutions.

WORLDWIDE ASSISTANCE STRUCTURE

Donatoni is present in many countries worldwide thanks to a structure of reliable and competent partners and agents, among which the Biesse group Intermac branches.

MACHINE INSTALLATION

Our machine are installed by highly specialized technicians granting extraordinary levels of professional work. Installation includes a careful installation service, commissioning of the machine and training of operators according to the model of machine installed.

ON SITE ASSISTANCE

We provide on site assistance at the clients premises if not possible to use the Tele Assistance by modem.

DIRECT CONNECTION - ON-LINE ASSISTANCE

Each machine is supplied with a system that enables it to be connected by Tele-Assistance to our After-sale service (we require connection to the network via a cable). This service enables our technical staff to virtually access the customer machine and to carry out checks, updates and to provide technical assistance as if they were there at the machine location in person.

PARTS AND REPLACEMENTS SERVICE

We handle requests for parts and replacements in any part of the world, in short time frames in order to minimise machine down-time.

CAD-CAM TECHNICAL ADVICE

we help our customers in creating and designing projects and objects.

THEORETICAL/PRACTICAL TRAINING

Training courses and update courses regarding new applications and software at our offices or at customer premises. Our offices are equipped to host courses for technicians and operators. The rooms are next to the machines on display in our show room and therefore this allows tests and checks to be carried out directly on the console of the machine and the level of learning can be evaluated.





TECHNICAL DATA

A:
D625+TWIN: 2965 mm
ECHO TWIN: 3500 mm
SPRINTER TWIN: 3950 mm

B:
D625+TWIN: 3750 mm
ECHO TWIN: 3930 mm
SPRINTER TWIN: 4200 mm

X:
D625+TWIN: 3800 mm
ECHO TWIN: 3900 mm
SPRINTER TWIN: 3900 mm

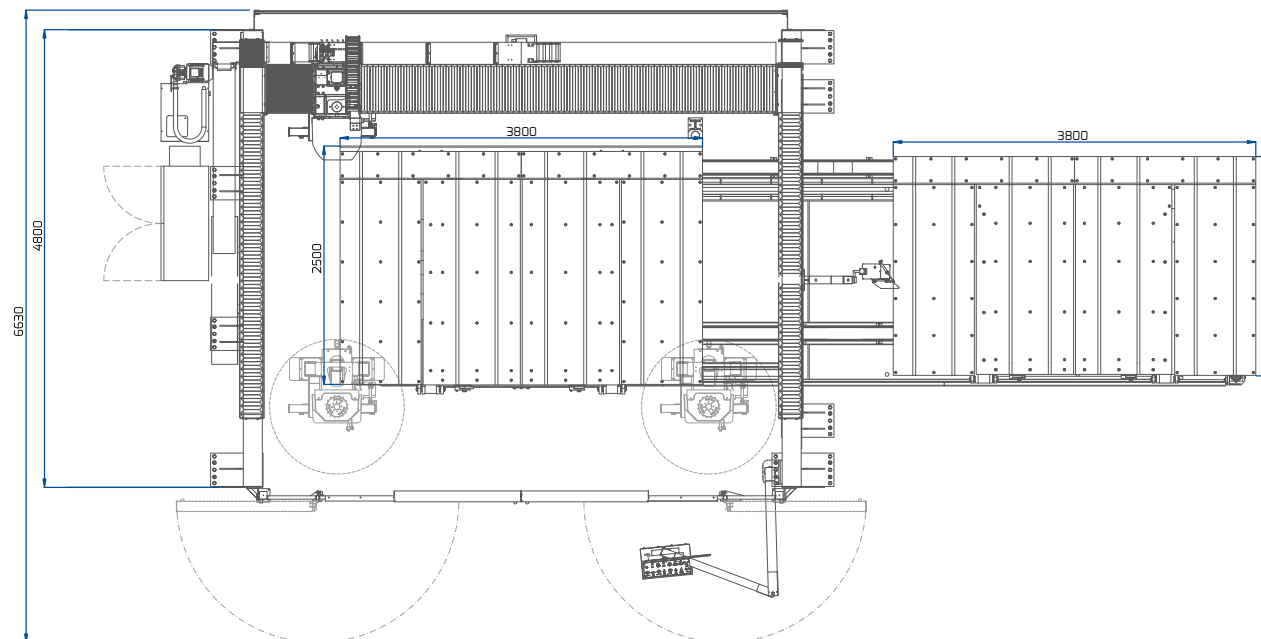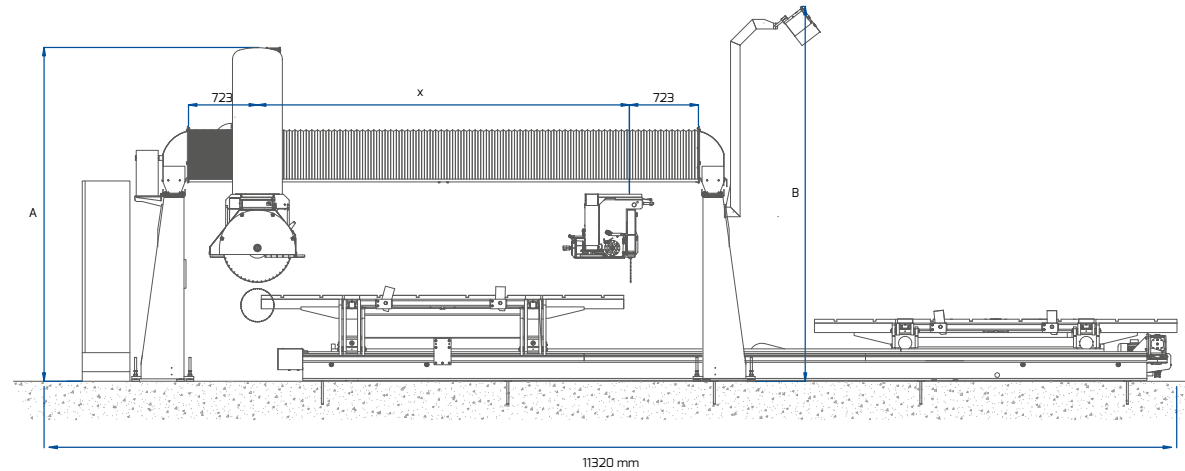

TWIN SYSTEM BRIDGE SAWS

D625+TWIN ECHO TWIN SPRINTER TWIN

| | | | | |
|-------------------------------------------------------------|---------|-------------------|----------------------------------------|--------------------------------------|
| Max number of interpolated axes | N° | 5 | 5/6 | 5/6 |
| Carriage stroke axis X | mm | 3800 | 3900 153,5 | 3800 149,6 |
| Bridge stroke axis Y | mm | 2900(1) / 4000(2) | 2950 116,1 | 2950 116,1 |
| Vertical stroke of the head axis Z | mm | 550 | 600 23,6 | 800 31,5 |
| Disk head rotation axis C | gradi | -5° / 365° | -5° / +365° | -5° / +365° |
| Disk head tilting movement axis A | gradi | 0° / 90° | 0° / 90° | 0° / 90° |
| Disk motor power | kW | 15 S1 / 17.6 S6 | 17/S6 13,2/S6 (models ATC e MTC) | 22/S6 17/S6 (models ATC e MTC) |
| Tool rotation with inverter (vs ST) | RPM | 0-5500 | 0 / 2400 | 0 / 2400 |
| Tools rotation with inverter (vs Tools/Top) (vs MTC/ATC) | RPM | 0-5500 | 0 / 5500 0 / 7500 | 0 / 5500 0 / 7500 |
| Speed axis X | m / min | 0 – 40 | 0-45 0-147,6 | 0-45 0-147,6 |
| Speed axis Y | m / min | 0 – 30 | 0-45 0-147,6 | 0-45 0-147,6 |
| Minimum disk diameter | mm | 350 | 350 13,8 | 350 13,8 |

D625+TWIN ECHO TWIN SPRINTER TWIN

| | | | | |
|--------------------------------------------|-----------|----------------|-----------------|-----------------|
| Maximum disk diameter | mm | 625 (725 opt.) | 725 28,5 | 825 32,4 |
| Speed axis Z | m / min | 0 – 5 | 0-6 0-19,7 | 0-6 0-19,7 |
| Speed of axes X Y | m / min | 0-30 | 0-45 0-147,6 | 0-45 0-147,6 |
| Water consumption | l / min | 35 | 50 13,2 | 50 13,2 |
| Air consumption | l / min | 20 | 20 5,3 | 20 5,3 |
| Standard voltage | Volt / Hz | 400±10% / 50 | 400 / 50 | 400 / 50 |
| Max disk with suction cups | mm | 525 | 725 28,5 | 725 28,5 |
| Total weight max lifting with suction cups | Kg | 500 | 600 1322,7 | 600 1322,7 |
| Approx total weight of the machine | Kg | 4500 | 4500 9920,8 | 4800 10582,1 |
| Benches exchange time | sec | 20 | 35 | 35 |
| Max cutting thickness (on bench 2) | mm | 150 | 250 9,8 | 300 11,8 |
| Slab max thickness with Twin System | mm | 50 | 100 3,9 | 100 3,9 |

The technical data and images in this catalog are indicative and do not constitute a constraint.
The manufacturer reserves the right to make changes to the product, technical data and images without prior notice.

RANGE OF PRODUCTS



DONATONI
HIGH INNOVATION STONE MACHINES

BRIDGE SAWS



Spin



Jet



Echo



Sprinter




Twin

BRIDGE SAWS



Quadrix DV 1100



Quadrix XL

MULTI-FUNCTIONAL CUTTING CENTRE




Z 1000 / 1400 / 1600 / 2000

UNIVERSAL CUTTING CENTRE




Kronos

POLISHING AND CALIBRATION SYSTEMS

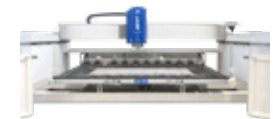

Zenit

SLAB LOADING / UNLOADING




Geko

ROBOT



Cyberstone CR01 / CR02

DRILLING MACHINE




KROSS

CUTTING LINES



SX-3 / SX-5

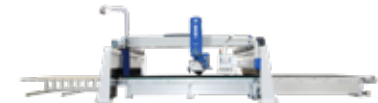

Belt

RANGE OF PRODUCTS

INTERMAC

CNC WORKING CENTRES



Master 23



Master One



Master 33.3-38.3-45.3



Master 33.3 Plus
38.3 Plus - 45.3 Plus



Master 33.5 Plus
38.5 Plus - 45.5 Plus

DOUBLE-EDGER FOR SINTERED MATERIALS



Busetti F series

WATERJET CUTTING SYSTEMS



Primus 184



Primus series



Master 850-1200

UNIVERSAL CNC WORKING CENTRES



Mastersaw 625 Double Table

AUTOMATIC UNIVERSAL CNC WORKING CENTRES



Genius RS-A

CUTTING TABLES FOR SINTERED MATERIALS


STORAGE AND HANDLING SYSTEMS FOR SINTERED MATERIALS



Navetta Lite

MONTRESOR EDGE POLISHERS - SINCE 1958

HORIZONTAL EDGE POLISHER STRAIGHT EDGE



Lola 6.4



Lola 8.6



Lola 10.8

HORIZONTAL EDGE POLISHER STRAIGHT EDGE AND BULLNOSE EDGE



Luna 7.4



Luna 8.6

VERTICAL EDGE POLISHER STRAIGHT EDGE



Vela 7.2

V-GROOVE



Viva 3.2

NOTES

[illegible]

NOTES

[illegible]

Donatoni Macchine Srl

Via Napoleone 14, 37015 Domegliara - Sant'Ambrogio di Valpolicella / Italy

Tel. +39 045 6862548

Fax +39 045 688 43 47

info@donatonimacchine.eu

www.donatonimacchine.eu

Donatoni Macchine, founded by Vittorio Donatoni in 1959 in Domegliara, one of the main marble and granite processing districts, is recognised, thanks to their years of experience gained in the natural stone industry during this time, as one of the world leaders in manufacturing **cutting-edge machines of very high quality for working stone**.

Constant research, technological innovation and customer service are key concepts for the company and in order to pursue them the company employs highly qualified technical and commercial personnel, in order to guarantee the end customer a **product that reflects their expectations in terms of quality and performance**.

